
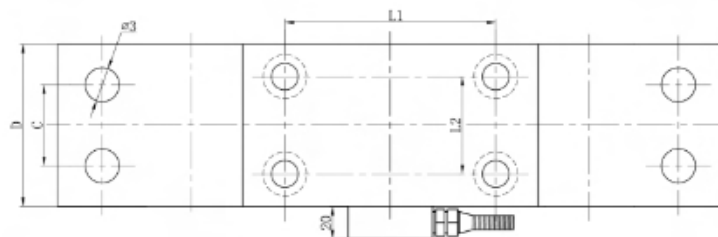


规格 (t)	BTW-AX1.5t	BTW-AX2.5t	BTW-AX4-10t
A	350	410	410
B	310	355	355
C	38	50	50
D	75	100	100
E	46	44.5	46
L	151	181	211
L1	100	130	160
L2	40	00	60
Ø1	Ø17.5	Ø17.5	Ø17
Ø2	Ø28	Ø28	Ø27
Ø3	Ø18	Ø22	Ø21.5

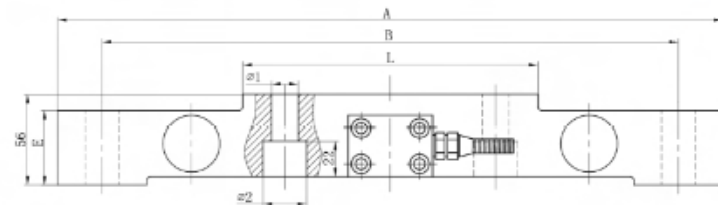

起重量限制器  
Lifting Weight Limiter

## TECHNICAL PARAMETER

4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

额定载荷 Rated capacities(Emax)	1.5,2.5,4,5,7.5,10t	温度补偿范围 Temperature range, compensated	-10℃~+40℃
灵敏度 Sensitivity	1.2±0.002mV/V	工作温度范围 Temperature range, operating	-30~+70℃
综合误差 Total error	±0.2%F.S	安全过载 Maximum safe overload	150%F.S
蠕变(30分钟)Creep error (30min)	±0.05%F.S	极限过载 Ultimate overload	200%F.S 250
零点平衡 Zero balance	±1%F.S	推荐激励电压 Excitation,recommend	10~12V DC
零点温度影响 TCO	±0.03%F.S/10℃	最大激励电压 Excitation,maximum	15V DC
输出温度影响 TC SPAN	±0.1%F.S/10℃	防封等级 Protection class	IP67
输入阻抗 Input impedance	750±10Ω	材质 Construction	合金钢Alloy Steel
输出阻抗 Output impedance	702±3Ω	电缆 Cable	Length:2m Diameter: φ 6mm
绝缘电阻 Insulation impedance	≥5000MΩ		