


额定载荷(kg) Rated Load	D
5,10,20,30,40,50,75	φ 8.2
100,150,200,250	φ 10.2
300,500	φ 10.2

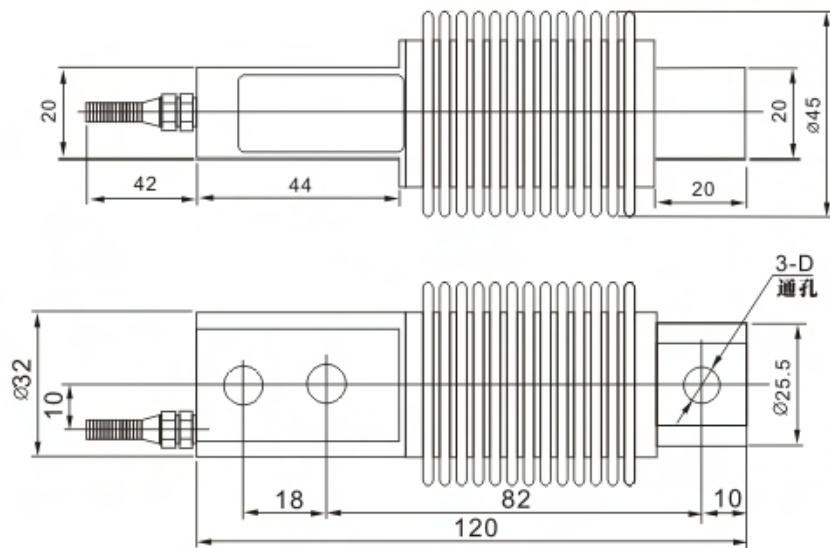

料斗秤、皮带秤、配料系统
Hopper scale, belt scale, blending system

TECHNICAL PARAMETER | 4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

额定载荷 Rated capacities(Emax)	5,10,20,30,40,50,75,100,150,200,250,300,500kg	温度补偿范围 Temperature range, compensated	-10℃~+40℃
灵敏度 Sensitivity	2.0±0.002mV/V	工作温度范围 Temperature range, operating	-30~+70℃
精度等级 Accuracy class	C2~C5	安全过载 Maximum safe overload	120%F.S
零点平衡 Zero balance	±1%F.S	极限过载 Ultimate overload	150%F.S
零点温度影响 TCO	±0.02%F.S/10℃	推荐激励电压 Excitation,recommend	10~12V DC
输出温度影响 TC SPAN	±0.02%F.S/10℃	最大激励电压 Excitation,maximum	15V DC
输入阻抗 Input impedance	400±20Ω	防封等级 Protection class	IP68
输出阻抗 Output impedance	352±3Ω	材质 Construction	合金钢Alloy Steel, 不锈钢Stainless Steel
绝缘电阻 Insulation impedance	≥5000MΩ	电缆 Cable	Length:3m,5m(HSX-A20kg) Diameter: φ 5mm