
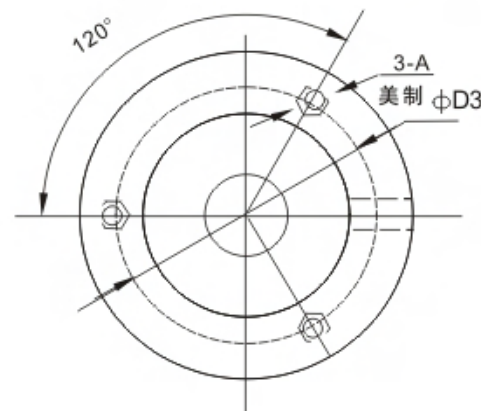


NKE-SS

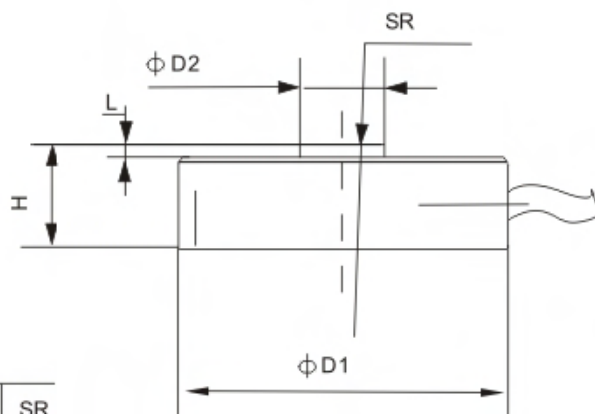

额定载荷 (lb) Rated Load	D1	D2	D3	H	L	A	SR
200~1000	32	8.1	25.4	10	1.8	#6-32UNC	35
3000~5000	38	11	31.4	16	2.0	#6-32UNC	35

空间小的压式测力场合

Pressure testing for small space

## TECHNICAL PARAMETER

4Wires: Exc+(红, Red); Exc-(黑, Black); Sig+(绿, Green); Sig-(白, White)

额定载荷 Rated capacities(E <sub>max</sub> )	200,500lb;1,2,3,5klb	温度补偿范围 Temperature range, compensated	-10°C~+40°C
灵敏度 Sensitivity	1.0~20 mV/V	工作温度范围 Temperature range, operating	-30~+70°C
综合误差 Total error	±0.5%F.S; ±1%F.S(3~5klb)	安全过载 Maximum safe overload	100%F.S
蠕变(30分钟)Creep error (30min)	±0.3%F.S	极限过载 Ultimate overload	120%F.S
零点平衡 Zero balance	±1%F.S	推荐激励电压 Excitation, recommend	5~10V DC
零点温度影响 TCO	±0.05%F.S/10°C	最大激励电压 Excitation, maximum	10V DC
输出温度影响 TC SPAN	±0.05%F.S/10°C	防封等级 Protection class	IP65
输入阻抗 Input impedance	380 ± 30 Ω	材质 Construction	不锈钢Stainless Steel
输出阻抗 Output impedance	352 ± 3 Ω	电缆 Cable	Length:1.5m
绝缘电阻 Insulation impedance	≥5000M Ω		Diameter: φ 3mm