


各种案秤、电子天平

All kinds of platform scales, electronic balance

TECHNICAL PARAMETER|

4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

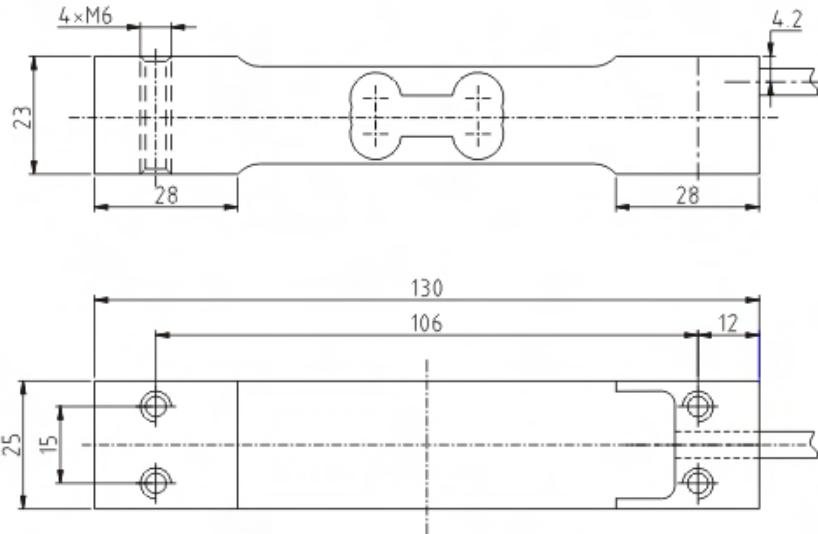

额定载荷 Rated capacities(Emax)	2,3,6,8,10,20,35kg	温度补偿范围 Temperature range, compensated	-10°C~+40°C
灵敏度 Sensitivity	1.5±0.2mV/V	工作温度范围 Temperature range, operating	-20°C~+50°C
精度等级 Accuracy class	20000d ~ 50000d	安全过载 Maximum safe overload	150%Emax
蠕变(30分钟)Creep error (30min)	± 166ppm	极限过载 Ultimate overload	300%Emax
零点平衡 Zero balance	± 3%Emax	推荐激励电压 Excitation,recommended	10V DC
零点温度影响 TC ZERO	± 17.5ppm/°C	最大激励电压 Excitation,maximum	15V DC
输出温度影响 TC SPAN	+20°C~+40°C, ± 17.5ppm/°C -10°C~+20°C, ± 11.5ppm/°C	防封等级 Protection class	IP65
输入阻抗 Input resistance	404 ± 15Ω	材质 Construction	铝合金 Aluminium
输出阻抗 Output resistance	350 ± 3 Ω	电缆 Cable	Length: 0.2m Diameter: φ 5mm
绝缘电阻 Insulation resistance	≥ 2000 MΩ (50V DC)	推荐安装力矩 Installation torque,recommended	10N · m
推荐安装台面 Max. platform size	300 × 300mm		