



HSXB-A Loadcell

HSXB-A



额定载荷(kg) Rated Load	L	L1	L2	L3	L4	D
25,50	152	22	12	52	42	φ8.5
100,200	168	28	19	62	48	φ11

料斗秤、皮带秤、配料系统
Hopper scale, belt scale, blending system

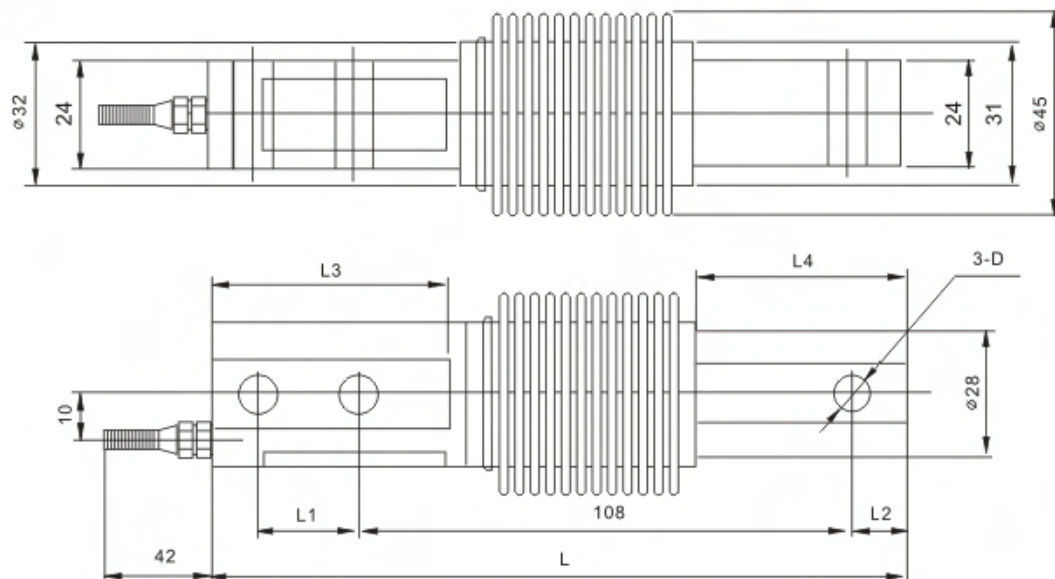

TECHNICAL PARAMETER

4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

额定载荷 Rated capacities(Emax)	25,50,100,200kg	温度补偿范围 Temperature range, compensated	-10°C~+40°C
灵敏度 Sensitivity	2.0±0.002mV/V	工作温度范围 Temperature range, operating	-30~+70°C
综合误差 Total error	±0.03%F.S	安全过载 Maximum safe overload	120%F.S
蠕变(30分钟)Creep error (30min)	±0.03%F.S	极限过载 Ultimate overload	150%F.S
零点平衡 Zero balance	±1%F.S	推荐激励电压 Excitation,recommend	10~12V DC
零点温度影响 TCO	±0.02%F.S/10°C	最大激励电压 Excitation,maximum	15V DC
输出温度影响 TC SPAN	±0.02%F.S/10°C	防封等级 Protection class	IP68
输入阻抗 Input impedance	400±20Ω	材质 Construction	合金钢Alloy Steel
输出阻抗 Output impedance	352±3Ω	电缆 Cable	Length:3m
绝缘电阻 Insulation impedance	≥5000MΩ		Diameter: φ 5mm