


钢包秤  
Steel embody scale

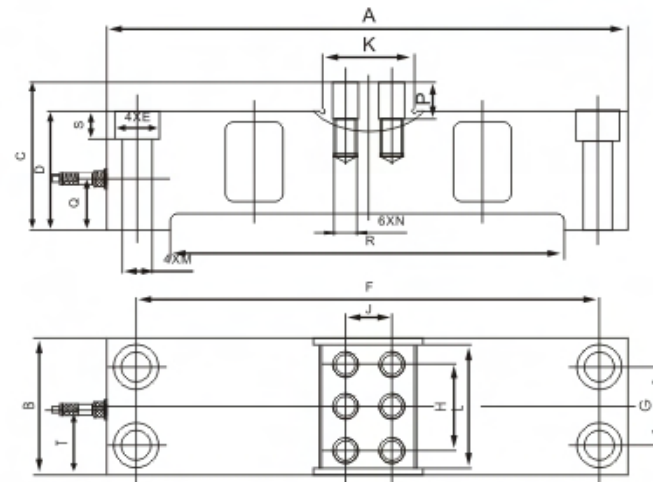

量程(t)	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T
50	450	120	130	105	φ38	398	68	75	40	80	110	φ26	M20 T30	32	45	340	25.5	57
100	500	140	143	118	φ44	444	80	90	44	90	130	φ30	M24 T36	38	54	370	28.5	62
150	560	160	158	133	φ48	500	94	102	44	90	150	φ33	M24 T36	38	66	410	32	69
200	620	180	175	150	φ48	560	114	110	44	90	160	φ33	M24 T40	40	75	450	32	76

## TECHNICAL PARAMETER

4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

额定载荷 Rated capacities(E <sub>max</sub> )	50,100,150,200t	温度补偿范围 Temperature range, compensated	-10℃~+40℃
灵敏度 Sensitivity	2.0±0.003mV/V	工作温度范围 Temperature range, operating	-30~+70℃
综合误差 Total error	±0.1%F.S	安全过载 Maximum safe overload	120%F.S
蠕变(30分钟)Creep error (30min)	±0.05%F.S	极限过载 Ultimate overload	200%F.S
零点平衡 Zero balance	±1%F.S	推荐激励电压 Excitation,recommend	10~12V DC
零点温度影响 TCO	±0.03%F.S/10℃	最大激励电压 Excitation,maximum	15V DC
输出温度影响 TC SPAN	±0.03%F.S/10℃	防封等级 Protection class	IP67
输入阻抗 Input impedance	750±10Ω	材质 Construction	合金钢Alloy Steel
输出阻抗 Output impedance	702±3Ω	电缆 Cable	Length:16m
绝缘电阻 Insulation impedance	≥5000MΩ		Diameter: φ 5mm