


适用于钢丝绳过载报警，超限载控制
Suitable for steel wire overload protection

量程 (t)	L(mm)	A(mm)
1, 2, 3	100	60
5	130	75

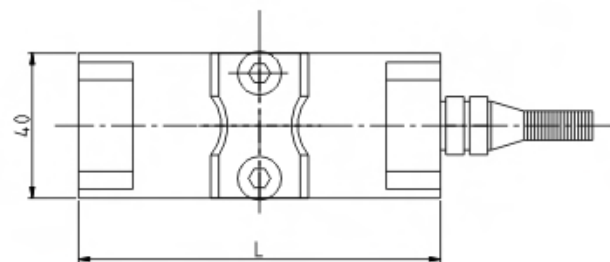

TECHNICAL PARAMETER

4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

额定载荷 Rated load	1,2,3,5t	工作温度范围 Operating Temp Range	-30~+70°C
灵敏度 Sensitivity	0.7±0.1 mV/V	安全过载 Safe load limit	120%F.S
综合误差 Total error	±1%F.S	极限过载 Lateral load limit	150%F.S
蠕变 (30分钟) Creep(30min)	±0.1%F.S	推荐激励电压 Recommend excitation	10~12V DC
零点平衡 Zero balance	±1%F.S	最大激励电压 Maximum excitation	15V DC
零点温度影响 TCO	±0.1%F.S/10°C	密封等级 Protection Class	IP67
输出温度影响 TC SPAN	±0.3%F.S/10°C	材质 Construction	合金钢 Alloy Steel
输入阻抗 Input resistance	750 ± 50 Ω	电缆 Cable	Length:10m
输出阻抗 Output resistance	702 ± 3 Ω		Diameter: φ 5mm
绝缘电阻 Insulation resistance	≥5000MΩ		