


起重机、压力机、压辊
Crane、press、press roller

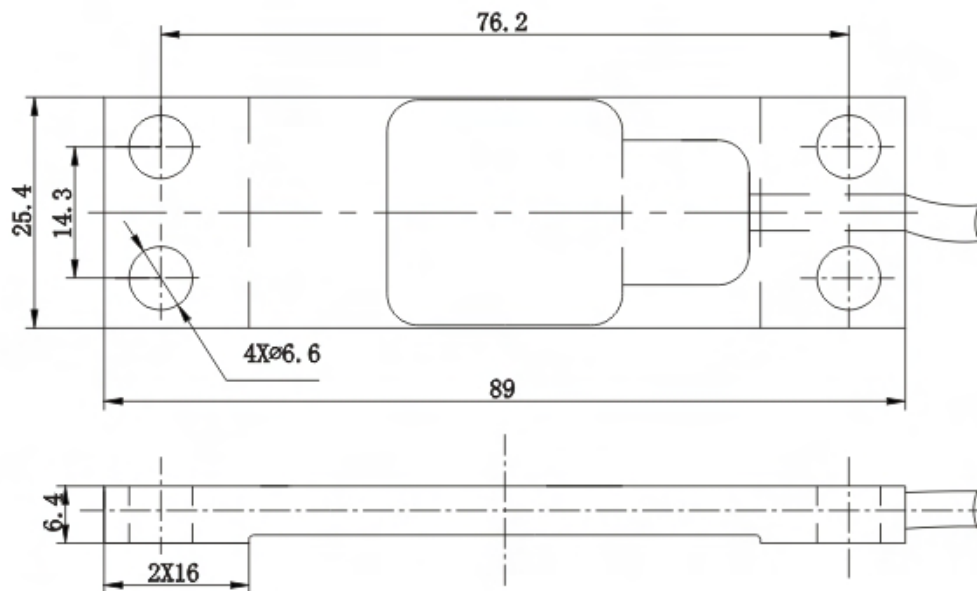

TECHNICAL PARAMETER

4Wires:Exc+(红,Red);Exc-(黑,Black);Sig+(绿,Green);Sig-(白,White)

额定载荷 Rated capacities(E _{max})	100,200kg	温度补偿范围 Temperature range, compensated	-10°C~+40°C
灵敏度 Sensitivity	1.0±0.15mV/V	工作温度范围 Temperature range, operating	-30~+70°C
综合误差 Total error	±4%F.S	安全过载 Maximum safe overload	120%F.S
零点平衡 Zero balance	±2%F.S	极限过载 Ultimate overload	150%F.S
零点温度影响 TCO	±0.5%F.S/10°C	推荐激励电压 Excitation,recommend	10~12V DC
输出温度影响 TC SPAN	±0.5%F.S/10°C	最大激励电压 Excitation,maximum	15V DC
输入阻抗 Input impedance	1000±10Ω	防护等级 Protection class	IP65
输出阻抗 Output impedance	1005±3Ω	材质 Construction	不锈钢Stainless Steel
绝缘电阻 Insulation impedance	≥5000MΩ	电缆 Cable	

Length: 6m Diameter: φ3mm