


可根据用户安装尺寸订做不同量程的传感器
Can make load cells in different capacity according to customer's installing dimensions

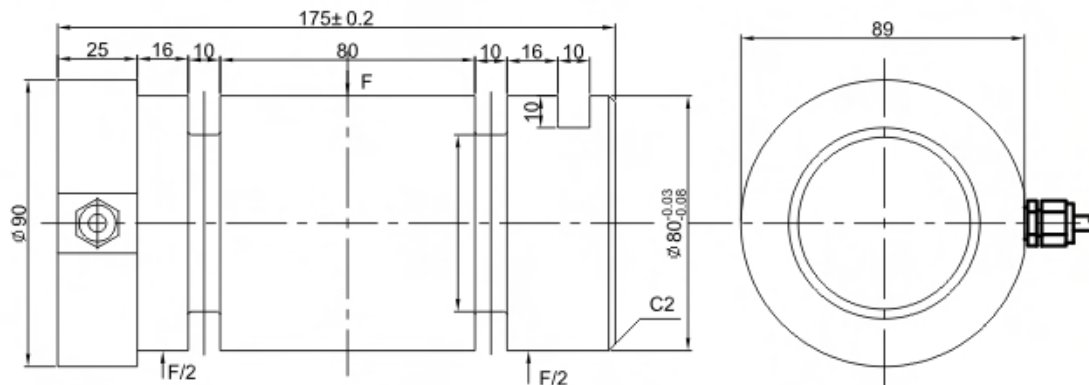

用于施工升降机、装载机等安全限制专用场合

Construction lifter, loading machine etc. safe limit special situation

TECHNICAL PARAMETER

4Wires: Exc+(红, Red); Exc-(黑, Black); Sig+(绿, Green); Sig-(白, White)

额定载荷 Rated capacities(E _{max})	15kN	温度补偿范围 Temperature range, compensated	-10~+40℃
灵敏度 Sensitivity	$1.0 \pm 0.05 \text{mV/V}$	工作温度范围 Temperature range, operating	-30~+70℃
综合误差 Total error	$\pm 0.5\% \text{F.S}$	安全过载 Maximum safe overload	150%F.S
蠕变(30分钟) Creep error (30min)	$\pm 0.3\% \text{F.S}$	极限过载 Ultimate overload	200%F.S
零点平衡 Zero balance	$\pm 1\% \text{F.S}$	推荐激励电压 Excitation, recommend	10~12V DC
零点温度影响 TCO	$\pm 0.3\% \text{F.S}/10^\circ\text{C}$	最大激励电压 Excitation, maximum	15V DC
输出温度影响 TC SPAN	$\pm 0.3\% \text{F.S}/10^\circ\text{C}$	防护等级 Protection class	IP67
输入阻抗 Input impedance	$750 \pm 10 \Omega$	材质 Construction	合金钢 Alloy Steel
输出阻抗 Output impedance	$702 \pm 3 \Omega$	电缆 Cable	Length: 15m
绝缘电阻 Insulation impedance	$\geq 5000 \text{M} \Omega$		Diameter: $\phi 5 \text{mm}$